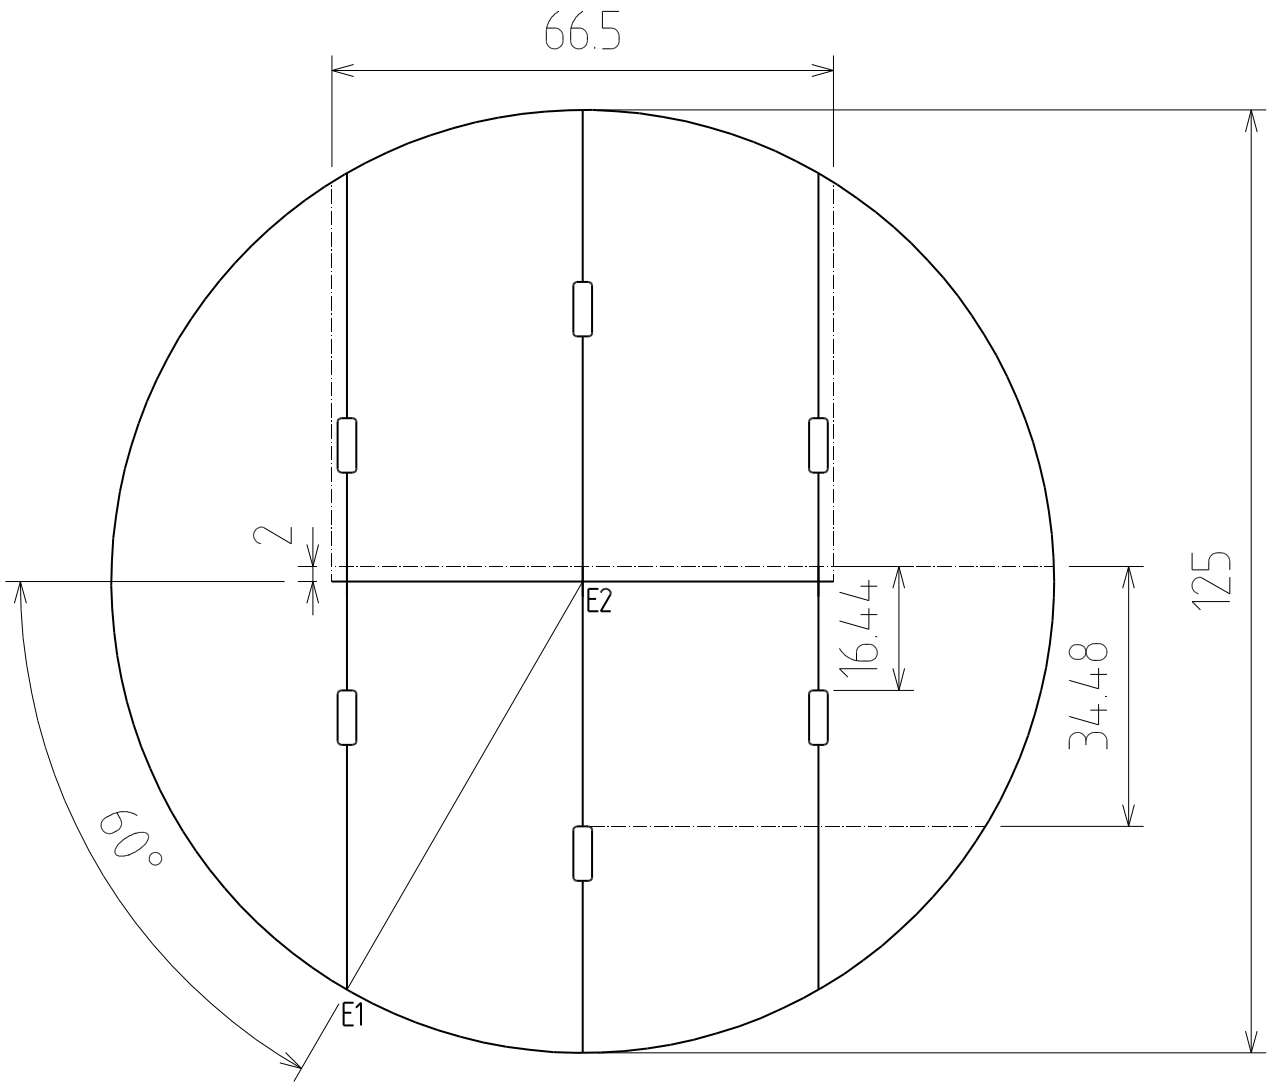

The diameter of circle on which the resistors are is chosen so that the distance from the resistor to the extreme point E1 is the same as to the extreme point E2.