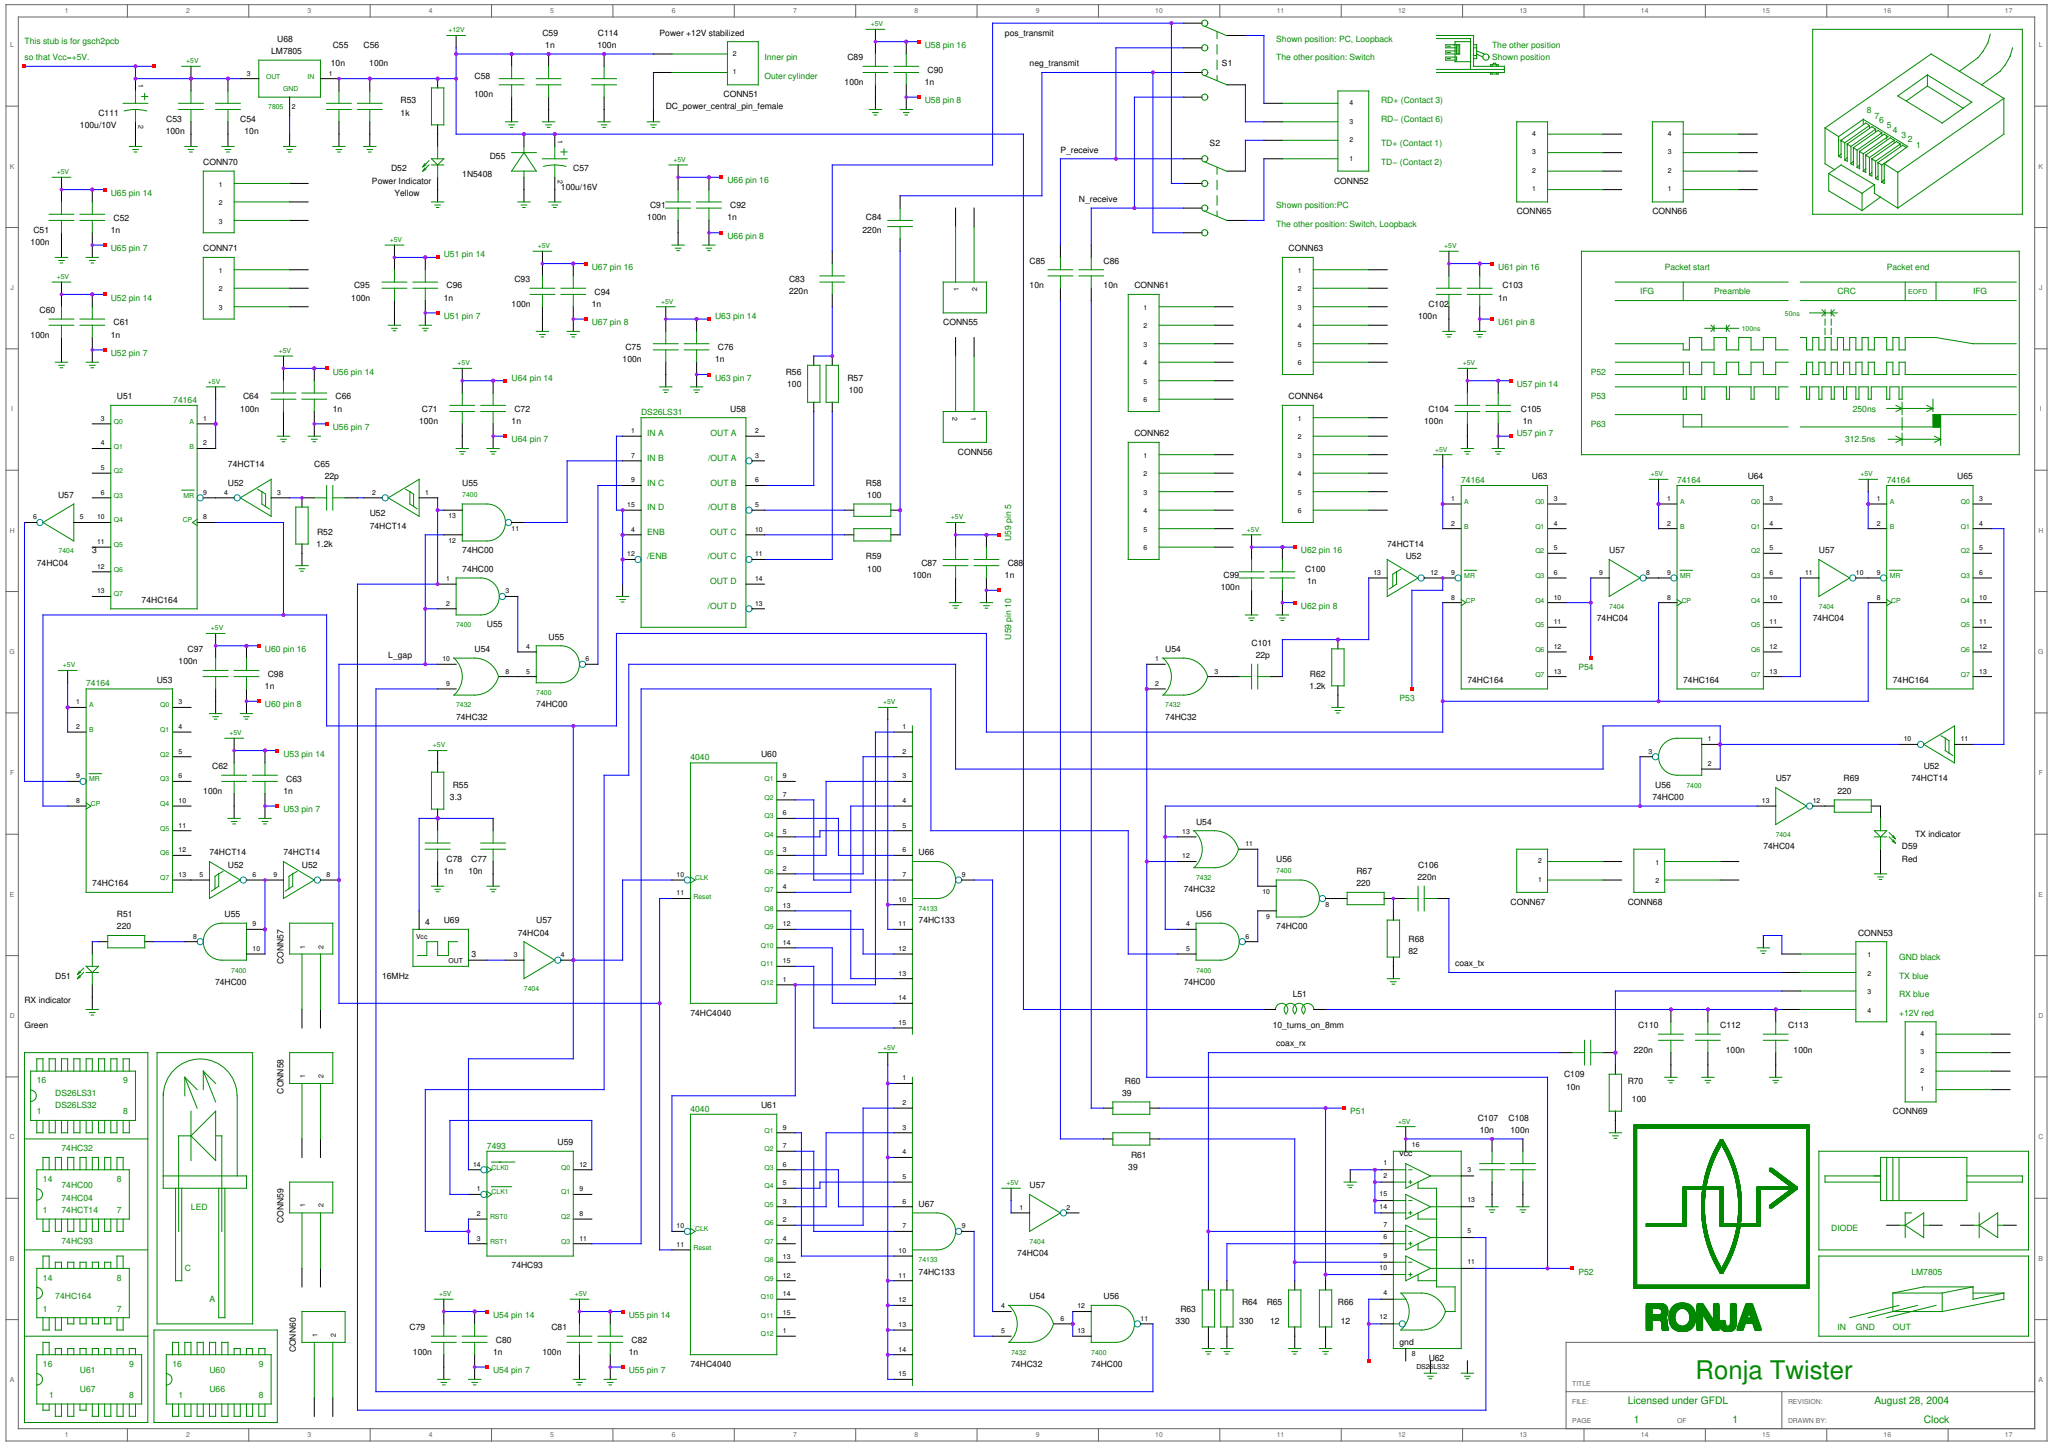

This stub is for gsch2pcb so that Vcc=+5V.
Power +12V stabilized
Inner pin
Outer cylinder
DC_power_central_pin_female
Shown position: PC, Loopback
The other position: Switch
Shown position:PC
The other position: Switch, Loopback
The other position
Shown position
RD+ (Contact 3)
RD- (Contact 6)
TD+ (Contact 1)
TD- (Contact 2)
Packet start
Packet end
IFG
Preamble
CRC
EOFD
IFG
250ns
312.5ns
RX indicator
Green
TX indicator
Red
GND black
TX blue
RX blue
+12V red
coax_tx
coax_rx
10_turns_on_8mm
16MHz
DIODE
LM7805
IN GND OUT
RONJA
Ronja Twister
TITLE
FILE: Licensed under GFDL
REVISION: August 28, 2004
PAGE 1 OF 1
DRAWN BY: Clock