BFR90_worst without compensation

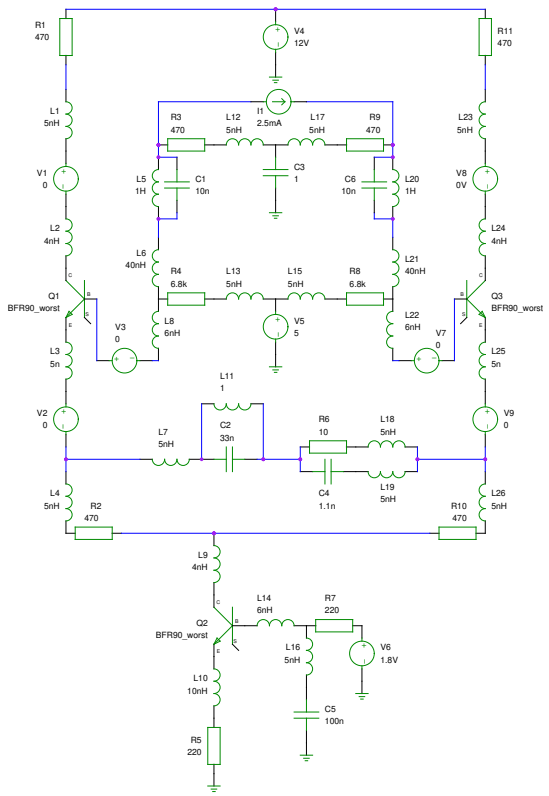

BFR90_worst with resonant circuits in series with base

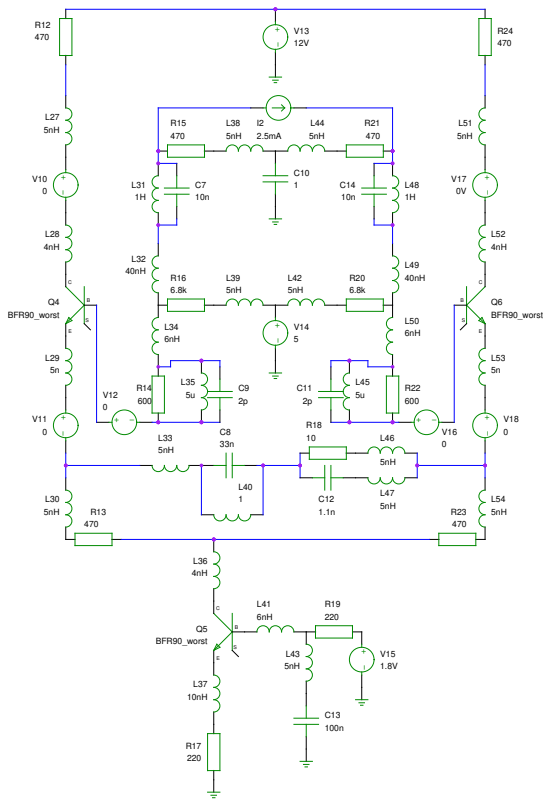

A1	Gnucap directive	.include sim/models/bfr91a_worst.lib
A2	Gnucap directive	.include sim/models/bfr90_worst.lib
A3	Gnucap directive	.include sim/models/bfr90_best.lib
A4	Gnucap options	numdgt=9 out=10000 clobber rstray
A5	Gnucap directive	.print ac zr(V1) zr(V3) zr(V2) zr(V10) zr(V12) zr(V11) zr(V8) zi(V8) zr(V7) zi(V7) zr(V9) zi(V9) zr(V17) zi(V17) zr(V16) zi(V16) zr(V18) zi(V18)
A6	Gnucap directive	.op
A7	Gnucap directive	.ac 1.2k 9.5G Dec 150 >sim/clipreso.data Basic Quiet

BFR90 worst and best stability in clipped state

TITLE			
FILE:	Released under GFDL	REVISION:	20081025
PAGE	1 OF 1	DRAWN BY:	Clock