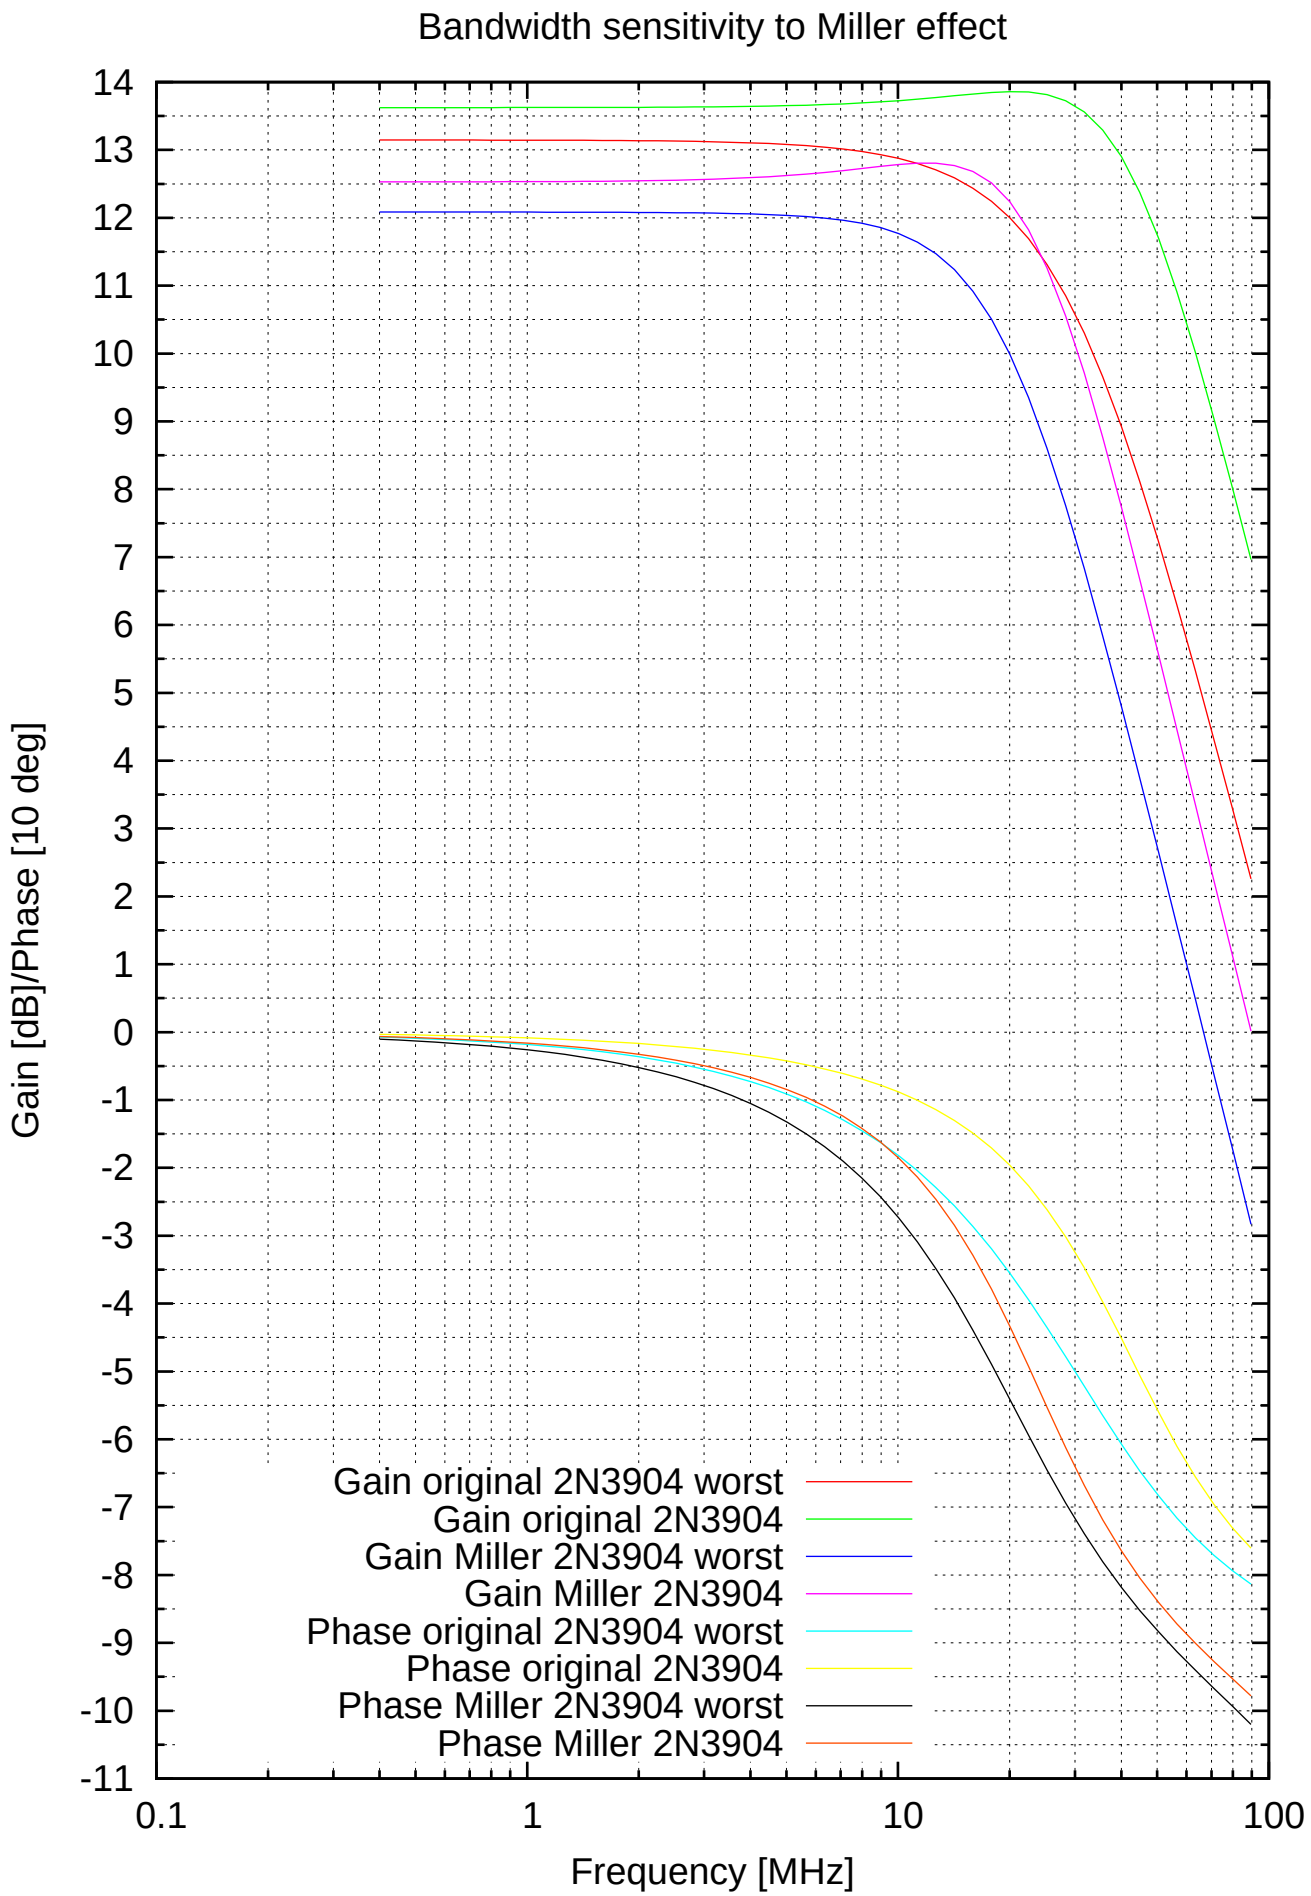
Bandwidth sensitivity to Miller effect
Gain [dB]/Phase [10 deg]
Frequency [MHz]
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
-1
-2
-3
-4
-5
-6
-7
-8
-9
-10
-11
0.1
1
10
100
Gain original 2N3904 worst
Gain original 2N3904
Gain Miller 2N3904 worst
Gain Miller 2N3904
Phase original 2N3904 worst
Phase original 2N3904
Phase Miller 2N3904 worst
Phase Miller 2N3904